
# PrehKeyTec

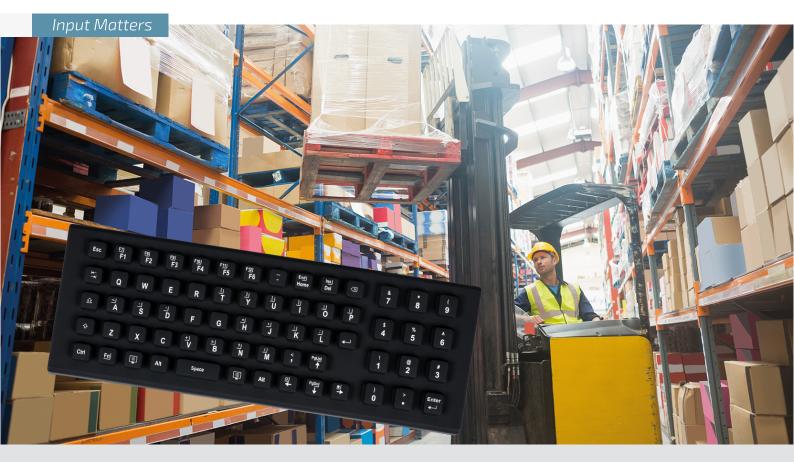

## SIK 65 Rugged Silicone Keyboard

### **Description**

The SIK 65 is an alphanumeric programmable keyboard with a rugged silicone surface, having been designed for use in harsh environments, rugged applications, wet rooms, machine control, military and emergency services, cold store, logistics/fork lift trucks, food production/catering, industrial equipment control and in other fields of activity where extreme environmental conditions are encountered.

The silicon surface protects against dust and liquid ingress, being sealed to meet IP66. The keyboard also features backlit keys to allow operation in dark and limited lighting conditions. The design of the key layout has also been enhanced to allow operators to work seamlessly even when the operators need to wear protective gloves.

### **Functionality and haptic**

- Red backlit keys
- Water resistant
- Wear resistant lettering
- Sensitivity adjustable
- Programmable keys

#### Reliability

- >1 million operations per key
- Dust and spray proof
- Shock proof
- Easily cleaned with disinfecting agents

#### **Features**

- 65 key positions
- Interface: USB
- IP66 rating
- Windows, Linux, DOS and MAC compatible
- Color: Black

PrehKeyTec GmbH is a leading manufacturer of advanced data input systems on the global market. Their product range comprises modular standard keyboards which are primarily characterized by their high degree of flexibility and their extreme reliability, making them the ideal option for professional applications.



# SIK 65 Technical Data

Key functions	Programmable via our WinProgrammer software
Key layout	<ul> <li>Compact US layout or compact German layout (others on request)</li> <li>18 mm key grid</li> </ul>
Color	• Black (similar to RAL 9011)
PC connection	• USB interface (< 500 mA including illumination)
Illumination	• Red LED through each key
Durability	• > 1 million operations per key
Temperature ranges	<ul> <li>Operating temperature -30°C to +50°C</li> <li>Storage temperature -30°C to +70°C</li> </ul>
Certifications	• CE • FCC • RoHS • REACH
Weight	Approx. 1000g without packaging

ca. 290 mm



Compact US layout

Subject to alterations 03/21 NB